



HANSON RIVET

& SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331

See pages D42-D47 for installation tools

Phone: 818-485-0500
FAX: 818-485-0540


Outside CA: 1-800-RRRIVET
www.hansonrivet.com




"T" STYLE BLIND RIVETS




T-Style Rivet bodies splits into petals and peels back onto the work surface upon setting. These rivets are designed for structural and similar high-strength applications. They offer exceptional pull-up properties and can be used in oversize holes.

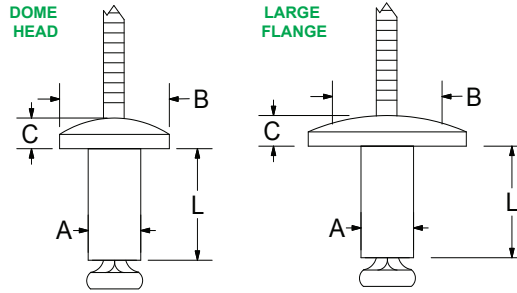

Backside Of Set Rivet

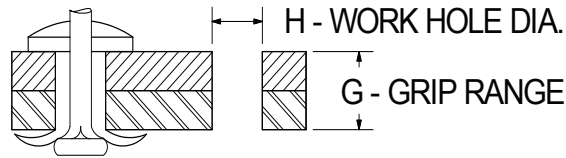

RIVET MATERIAL MANDREL MATERIAL	HEAD STYLE	ITEM NUMBER	PART NUMBER	BODY DIAMETER "A"	WORK HOLE & DRILL SIZE "H"	GRIP RANGE "G"	BODY LENGTH (NOM.) "L"	HEAD DIAMETER (NOM.) "B"	HEAD HEIGHT (MAX.) "C"	TYPICAL ULTIMATE STRENGTHS IN LBS. (SEE NOTE)	
										SHEAR	TENSILE
ALUMINUM RIVET PLAIN FINISH  STEEL MANDREL <small>Various colors and finishes available</small>	DOME HEAD	PAST402	AD42TFBS	.125 1/8	.142 #27	.063-.125	.354	.242	.048	180	213
		PAST403	AD43TFBS			.126-.187	.433				
		PAST404	AD44TFBS			.188-.250	.512				
		PAST406	AD46TFBS			.251-.312	.590				
		PAST407	AD47TFBS			.313-.437	.669				
		PAST502	AD52TFBS			.156 5/32	.173 #17				
		PAST503	AD53TFBS	.126-.187	.433						
		PAST504	AD54TFBS	.188-.250	.512						
		PAST505	AD55TFBS	.251-.312	.590						
		PAST506	AD56TFBS	.313-.375	.669						
		PAST508	AD58TFBS	.376-.500	.748						
		PAST510	AD510TFBS	.501-.625	.827						
	LARGE FLANGE	PAST6140	AD6140TFBS	.187 3/16	.192/.196 #11	.032-.140	.447	.390	.103	950	600
		PAST6187	AD6187TFBS			.141-.187	.510				
		PAST6250	AD6250TFBS			.188-.250	.572				
		PAST6312	AD6312TFBS			.251-.312	.635				
		PAST6375	AD6375TFBS			.313-.375	.697				
		PAST6437	AD6437TFBS			.376-.437	.760				
		PAST6519	AD6519TFBS			.438-.519	.822				
		PAST8140	AD8140TFBS			.250 1/4	.257/.261 F				
PAST8187	AD8187TFBS	.141-.187	.552								
PAST8250	AD8250TFBS	.188-.250	.615								
PAST8312	AD8312TFBS	.251-.312	.677								
PAST8375	AD8375TFBS	.313-.375	.740								
PAST8437	AD8437TFBS	.376-.437	.802								
PAST8519	AD8519TFBS	.438-.519	.865								
PAST8620	AD8620TFBS	.520-.620	.937								
LARGE FLANGE	PASTL6075	AD6075TFBSLF	.187 3/16	.192/.196 #11	.046-.140	.382	.563	.103	950	600	
	PASTL6140	AD6140TFBSLF			.032-.140	.447					
	PASTL8140	AD8140TFBSLF			.032-.140	.500					.750

NOTE: Values for typical ultimate strengths are a guide only and may vary greatly depending upon the application.



HANSON RIVET

& SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331

See pages D42-D47 for
installation tools

Phone: 818-485-0500
FAX: 818-485-0540


Outside CA: 1-800-RRRIVET
www.hansonrivet.com



"T" STYLE BLIND RIVET



T-Style Rivet body splits into petals and peels back onto the work surface upon setting. These rivets are designed for structural and similar high-strength applications. They offer exceptional pull-up properties and can be used in oversize holes.

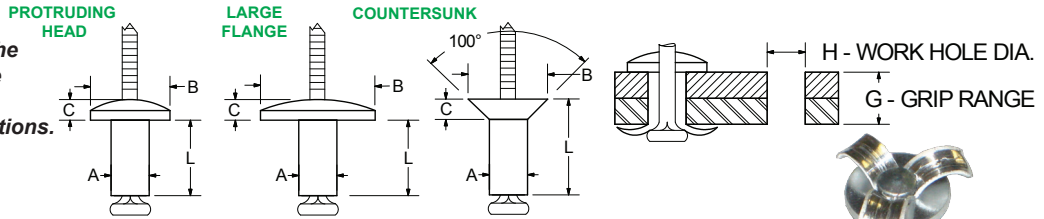

Backside of set rivet



RIVET MATERIAL MANDREL MATERIAL	HEAD STYLE	PART NUMBER	BODY DIAMETER "A"	WORK HOLE & DRILL SIZE "H"	GRIP RANGE "G"	BODY LENGTH (MAX.) "L"	HEAD DIAMETER (NOM.) "B"	HEAD HEIGHT (MAX.) "C"	TYPICAL ULTIMATE STRENGTHS IN LBS. (SEE NOTE)									
									SHEAR	TENSILE								
ALUMINUM RIVET PLAIN FINISH	PROTRUDING HEAD	BSPT-06-062	.187 3/16	.192/.196 #11	.046-.078	.395	.395	.091	1000	600								
		BSPT-06-093			.078-.109	.395												
		BSPT-06-125			.109-.140	.395												
		BSPT-06-156			.140-.171	.395												
		BSPT-06-187			.171-.203	.457												
		BSPT-06-218			.203-.234	.457												
		BSPT-06-250			.234-.265	.529												
		BSPT-06-281			.265-.296	.529												
		BSPT-06-312			.296-.328	.582												
		BSPT-06-343			.328-.359	.582												
		BSPT-06-375			.359-.390	.645												
		BSPT-06-406			.390-.421	.645												
		BSPT-06-437			.421-.453	.707												
		BSPT-06-468			.453-.484	.707												
	BSPT-06-500	.484-.515	.770															
	STEEL MANDREL	LARGE FLANGE	BSPT-08-125	.250 1/4	.257/.261 F	.093-.156	.500	.520	.110	1900	1100							
			BSPT-08-187			.156-.218	.562											
			BSPT-08-250			.218-.281	.625											
			BSPT-08-312			.281-.343	.687											
			BSPT-08-375			.343-.406	.750											
			BSPT-08-437			.406-.468	.812											
			BSPT-08-500			.468-.531	.875											
			BSPT-08-562			.531-.593	.937											
			STEEL MANDREL			LARGE FLANGE	BSLT-06-062					.187 3/16	.192/.196 #11	.046-.078	.395	.562	.091	1000
BSLT-06-093							.078-.109							.395				
BSLT-06-125	.109-.140	.395																
BSLT-06-156	.140-.171	.395																
BSLT-06-187	.171-.203	.457																
BSLT-06-218	.203-.234	.457																
BSLT-06-250	.234-.265	.529																
BSLT-06-281	.265-.296	.529																
BSLT-06-312	.296-.328	.582																
BSLT-06-343	.328-.359	.582																
BSLT-06-375	.359-.390	.645																
BSLT-06-406	.390-.421	.645																
BSLT-06-437	.421-.453	.707																
BSLT-06-468	.453-.484	.707																
BSLT-06-500	.484-.515	.770																
STEEL MANDREL	LARGE FLANGE	BSLT-08-125	.250 1/4	.257/.261 F	.093-.156	.500	.750	.110	1900	1100								
		BSLT-08-187			.156-.218	.562												
		BSLT-08-250			.218-.281	.625												
		BSLT-08-312			.281-.343	.687												
		BSLT-08-375			.343-.406	.750												
		BSLT-08-437			.406-.468	.812												
		BSLT-08-500			.468-.531	.875												
		BSLT-08-562			.531-.593	.937												
		MULTI-GRIP "T" STYLE RIVETS																
		STEEL MANDREL			PROTRUDING HEAD	BSPT-06-03					.187 3/16	.192/.196 #11	.046-.203	.457	.395	.091	1000	600
BSPT-06-06	.203-.390		.645															
BSPT-06-09	.390-.578		.832															
STEEL MANDREL	LARGE FLANGE	BSLT-06-03	.187 3/16	.192/.196 #11	.046-.203	.457	.562	.091	1000	600								
	BSLT-06-06	.203-.390			.645													
	BSLT-06-09	.390-.578			.832													
STEEL MANDREL	100° COUNTERSUNK	BSCT-06-06	.187 3/16	.192/.196 #11	.203-.390	.645	.371	.093	1000	600								
	BSCT-06-09	.390-.578			.832													
	BSCT-06-12	.578-.765			1.02													

Various colors and finishes available



HANSON RIVET

& SUPPLY CO.
13241 Weidner Street
Pacoima, CA 91331

See pages D42-D47 for installation tools

Phone: 818-485-0500
FAX: 818-485-0540


Outside CA: 1-800-RRRIVET
www.hansonrivet.com




"T" STYLE BLIND RIVET



T-Style Rivets body splits into petals and peels back onto the work surface upon setting. These rivets are designed for structural and similar high-strength applications. They offer exceptional pull-up properties and can be used in oversize holes.

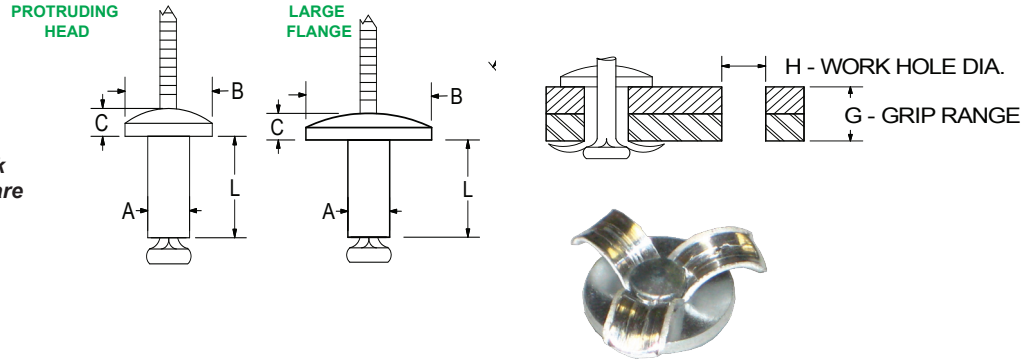

Backside of set rivet

RIVET MATERIAL MANDREL MATERIAL	HEAD STYLE	PART NUMBER	BODY DIAMETER "A"	WORK HOLE & DRILL SIZE "H"	GRIP RANGE "G"	BODY LENGTH (MAX.) "L"	HEAD DIAMETER (NOM.) "B"	HEAD HEIGHT (MAX.) "C"	TYPICAL ULTIMATE STRENGTHS IN LBS. (SEE NOTE)	
									SHEAR	TENSILE
ALUMINUM RIVET PLAIN FINISH  ALUMINUM MANDREL <small>Various colors and finishes available</small>	PROTRUDING HEAD	BAPTS-06-062	.187 3/16	.192/.196 #11	.046-.078	.395	.395	.091	800	550
		BAPTS-06-093			.078-.109	.395				
		BAPTS-06-125			.109-.140	.395				
		BAPTS-06-156			.140-.171	.395				
		BAPTS-06-187			.171-.203	.457				
		BAPTS-06-218			.203-.234	.457				
		BAPTS-06-250			.234-.265	.529				
		BAPTS-06-281			.265-.296	.529				
		BAPTS-06-312			.296-.328	.582				
		BAPTS-06-343			.328-.359	.582				
		BAPTS-06-375			.359-.390	.645				
		BAPTS-06-406			.390-.421	.645				
	BAPTS-06-437	.421-.453	.707							
	BAPTS-06-468	.453-.484	.707							
	BAPTS-06-500	.484-.515	.770							
	BAPTS-08-125	.250 1/4	.257/.261 F	.093-.156	.500	.520	.110	1400	1000	
	BAPTS-08-187			.156-.218	.562					
	BAPTS-08-250			.218-.281	.625					
	BAPTS-08-312			.281-.343	.687					
	BAPTS-08-375			.343-.406	.750					
	BAPTS-08-437			.406-.468	.812					
	BAPTS-08-500			.468-.531	.875					
	BAPTS-08-562			.531-.593	.937					
	BALTS-06-062	.187 3/16	.192/.196 #11	.046-.078	.395	.562	.091	800	550	
BALTS-06-093	.078-.109			.395						
BALTS-06-125	.109-.140			.395						
BALTS-06-156	.140-.171			.395						
BALTS-06-187	.171-.203			.457						
BALTS-06-218	.203-.234			.457						
BALTS-06-250	.234-.265			.529						
BALTS-06-281	.265-.296			.529						
BALTS-06-312	.296-.328			.582						
BALTS-06-343	.328-.359			.582						
BALTS-06-375	.359-.390			.645						
BALTS-06-406	.390-.421			.645						
BALTS-06-437	.421-.453	.707								
BALTS-06-468	.453-.484	.707								
BALTS-06-500	.484-.515	.770								
BALTS-08-125	.250 1/4	.257/.261 F	.093-.156	.500	.750	.110	1400	1000		
BALTS-08-187			.156-.218	.562						
BALTS-08-250			.218-.281	.625						
BALTS-08-312			.281-.343	.687						
BALTS-08-375			.343-.406	.750						
BALTS-08-437			.406-.468	.812						
BALTS-08-500			.468-.531	.875						
BALTS-08-562			.531-.593	.937						

NOTE: Values for typical ultimate strengths are a guide only and may vary greatly depending upon the application.